

## **SPECIFICATION FOR APPROVAL**

**MODEL : S305A-P**

**PYROELECTRIC INFRARED SENSOR**

**CUSTOMER:  
APPROVED BY:  
DATE:**

TYPE : S305A-P

PAGE : 1 /6

CHART :

EDITION : A

NICERA SENSOR  
CO.,LTD

## TYPE OF SENSOR

GENERAL PURPOSE DUAL ELEMENTS

## PHYSICAL CONFIGURATION

- |                        |                |
|------------------------|----------------|
| (1) PACKAGE            | TO-5 METAL CAN |
|                        | SEE FIGURE A   |
| (2) SENSITIVE AREA     | 2.0×1.0 mm     |
| (3) LEAD CONFIGURATION | SEE FIGURE B,C |

## ELECTRICAL CHARACTERISTICS (AT 25±5 ℃)

- |                                |  |
|--------------------------------|--|
| (1) CIRCUIT CONFIGURATION      | SEE FIGURE D   |
| (2) SUPPLY VOLTAGE             | 2.2~15 V DC (Drain-Ground)<br>(Rs: 47K $\Omega$ )  |
| (3) OFFSET VOLTAGE             | 0.4~1.1 V  |
| (4) SIGNAL OUTPUT              | TYP 0.7 V ( $V_D=10V$ , Rs=47K $\Omega$ )<br>Min 2.5 Vp-p<br>TYP 3.9 Vp-p (Source-Ground)<br>(BLACK BODY 420K; CHOPPER<br>FREQUENCY 1Hz; MEASUREMENT<br>AMP. 0.3~3.0Hz、72.5db(AT 1Hz))<br>SEE FIGURE F |
| (5) SENSITIVITY 420K, 1Hz      | 3300 V/W   |
| (6) DETECTIVITY (420K,1Hz,1Hz) | 1.5×10 <sup>8</sup> cmHz <sup>1/2</sup> /W   |
| (7) BALANCE OUTPUT             | Max 20% (Source-Ground)<br>(BLACK BODY 420K; CHOPPER<br>FREQUENCY 1Hz; MEASUREMENT<br>AMP. 0.3~3.0Hz、72.5db(AT 1Hz))<br>SEE FIGURE G   |

TYPE : S305A-P

PAGE : 2 /6

CHART :

EDITION : A

NICERA SENSOR CO.,LTD

- |                        |   |
|------------------------|---|
| (8) NOISE OUTPUT       | Max 200mV<br>TYP 80 mV (Source-Ground)<br>(MEASUREMENT AMP. 0.3 ~ 3.0Hz、<br>72.5db(AT 1Hz))<br>SEE FIGURE H |
| (9) NEP (420K,1Hz,1Hz) | $9.6 \times 10^{-10}$ W   |

### **OPTICAL CHARACTERISTICS**

- |                       |   |
|-----------------------|---|
| (1) FIELD OF VIEW     | 138 ° × 125 °<br>SEE FIGURE I   |
| (2) SPECTRAL RESPONSE | Si Filter Cuton 5.0±0.5μm<br>Thickness 0.5mm<br>Average T> 70%<br>Pass Band 7.0 ~ 14μ |

### **ENVIRONMENTAL REQUIREMENTS**

- |                           |             |
|---------------------------|-------------|
| (1) OPERATING TEMPERATURE | -30 ~ +70 ℃ |
| (2) STORAGE TEMPERATURE   | -40 ~ +80 ℃ |

### **※ NOTES**

#### **1. DESIGN RESTRICTIONS/PRECAUTIONS**

FOR OUTDOOR APPLICATIONS , BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF 。 ANTI-DEW CONSTRUCTION。 THIS SENSOR IS DESIGNED FOR INDOOR USE。 IN CASES WHERE SECONDARY ACCIDENTS DEE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED 。 ADD A FAIL SAFE FUNCTION TO THE DESIGN。

#### **2. USAGE RESTRICTIONS/PRECAUTIONS**

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL, FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT USE THIS SENSOR IN FOLLOWING, OR SIMILAR, CONDITIONS.

TYPE: S305A-P	PAGE: 3 /6	CHART:	EDITION: A
	NICERA SENSOR CO.,LTD		

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION. CUSTOMERSTO USE FALL PROTECTION, CERAMIC CHIP FRAGILE.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS.FOG.ETC) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID. CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONS.
- H. PRODUCTION PROCESS, NOT THE ACCUMULATION OF STACKED PCB BOARD, THE FILTER IS EASILY DAMAGED.

### 3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

#### SOLDERING-----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY.(E.G. WITHIN 5 SEC. AT 350 ℃)
- C. AVOID STATIC ELECTRICITYOR STRONG ELECTROMAGNETIC WAVES. RECOMMENDED TO WEAR A SHIELD RING.

#### WASHING-----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS RENAINER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING.WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

### 4.HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE. APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITYOR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOWS.

SENSOR TROUBLES RESULTING FROM MISUSE. INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER ´ S RESPONSIBILITY.

TYPE: S305A-P


PAGE: 4 /6

CHART:


EDITION: A

NICERA SENSOR CO.,LTD


**TOP VIEW  
(FIGURE A)**

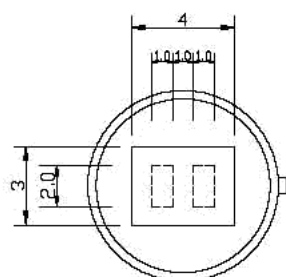


**SIDE VIEW  
(FIGURE B)**

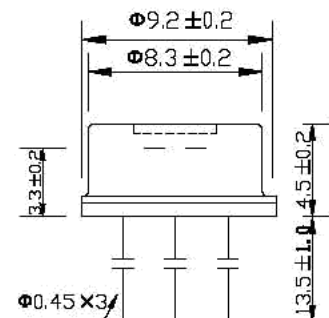


**BASE VIEW  
(FIGURE C)**

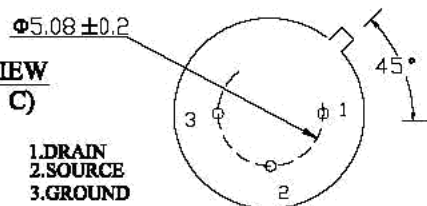

**CIRCUIT CONFIGURATION  
(FIGURE D)**

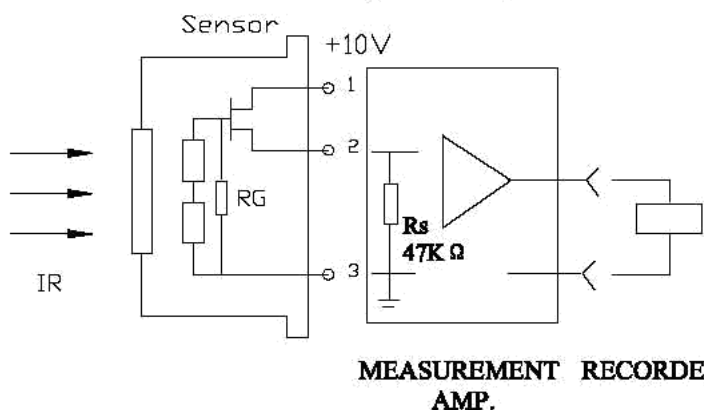

**FIELD OF VIEW  
(FIGURE I)**



TYPE: S305A-P


PAGE: 5/6

CHART:


EDITION: A

NICERA SENSOR CO.,LTD


**TEST DIAGRAM**  
**(FIGURE E)**

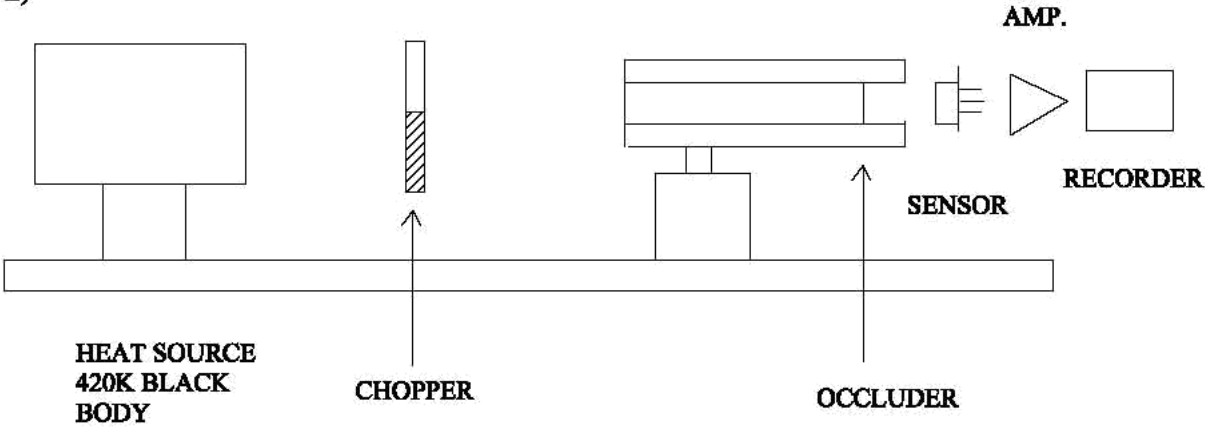


**OCCLUDER POSITION**

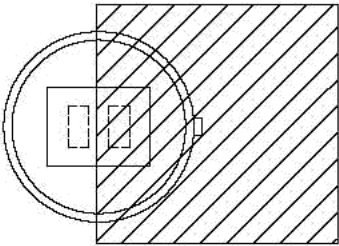

**SIGNAL OUTPUT**  
**(FIGURE F)**

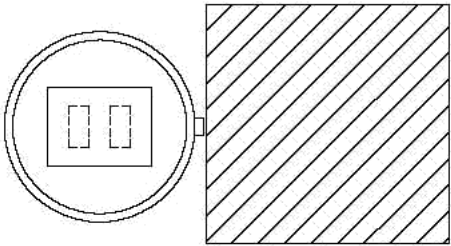

**BALANCE OUTPUT**  
**(FIGURE G)**



**NOISE OUTPUT**  
**(FIGURE H)**