

SPECIFICATION FOR APPROVAL

MODEL : SLA-P

PYROELECTRIC INFRARED SENSOR

**CUSTOMER:
APPROVED BY:
DATE:**

TYPE: SLA-P

PAGE: 1 /6

CHART:

EDITION: A

NICERA SENSOR CO.,LTD

TYPE OF SENSOR

GENERAL PURPOSE DUAL ELEMENTS

PHYSICAL CONFIGURATION

- | | |
|------------------------|--------------------------------|
| (1) PACKAGE | TO-5 METAL CAN
SEE FIGURE A |
| (2) SENSITIVE AREA | 2.3×1.0 mm |
| (3) LEAD CONFIGURATION | SEE FIGURE B,C |

ELECTRICAL CHARACTERISTICS (AT 25±5°C)

- | | |
|--------------------------------|---|
| (1) CIRCUIT CONFIGURATION | SEE FIGURE D |
| (2) SUPPLY VOLTAGE | 2.2~15 V DC (Drain-Ground)
(Rs: 47K Ω) |
| (3) OFFSET VOLTAGE | 0.4~1.0 V
TYP 0.6 V (V _D =10V, Rs=47K Ω) |
| (4) SIGNAL OUTPUT | Min 3.5 Vp-p
TYP 5.0 Vp-p (Source-Ground)
(BLACK BODY 420K; CHOPPER
FREQUENCY 1Hz: MEASUREMENT
AMP. 0.3~3.0Hz、72.5db(AT 1Hz))
SEE FIGURE F |
| (5) SENSITIVITY 420K, 1Hz | 4300 V/W |
| (6) DETECTIVITY (420K,1Hz,1Hz) | 1.65×10 ⁸ cmHz ^{1/2} /W |
| (7) BALANCE OUTPUT | Max 15% (Source-Ground) B/S
(BLACK BODY 420K; CHOPPER
FREQUENCY 1Hz: MEASUREMENT
AMP. 0.3~3.0Hz、72.5db(AT 1Hz))
SEE FIGURE G |

TYPE: SLA-P

PAGE: 2 /6

CHART:

EDITION: A

NICERA SENSOR CO.,LTD

(8) NOISE OUTPUT	Max 160mV TYP 70 mV (Source-Ground) (MEASUREMENT AMP. 0.3~3.0Hz、 72.5db(AT 1Hz)) SEE FIGURE H
(9) NEP (420K,1Hz,1Hz)	9.0×10^{-10} W

OPTICAL CHARACTERISTICS

(1) FIELD OF VIEW	143° × 132° SEE FIGURE I
(2) SPECTRAL RESPONSE	Si Filter Cuton $5.5 \pm 0.5 \mu m$ Thickness 0.5mm Average T > 74% Pass Band 7.0 ~ 14 μ

ENVIRONMENTAL REQUIREMENTS

(1) OPERATING TEMPERATURE	-30 ~ +70 °C
(2) STORAGE TEMPERATURE	-40 ~ +80 °C

※ **NOTES**

1. DESIGN RESTRICTIONS/PRECAUTIONS

FOR OUTDOOR APPLICATIONS, BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF. ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE. IN CASES WHERE SECONDARY ACCIDENTS DUE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED. ADD A FAIL SAFE FUNCTION TO THE DESIGN.

2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL, FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT USE THIS SENSOR IN FOLLOWING, OR SIMILAR, CONDITIONS.

TYPE: SLA-P	PAGE: 3 / 6	CHART:	EDITION: A
	NICERA SENSOR CO.,LTD		

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION. CUSTOMERS TO USE FALL PROTECTION, CERAMIC CHIP FRAGILE.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS.FOG.ETC) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID. CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONS.
- H. PRODUCTION PROCESS, NOT THE ACCUMULATION OF STACKED PCB BOARD,THE FILTER IS EASILY DAMAGED.

3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING-----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY.(E.G. WITHIN 5 SEC. AT 350°C)
- C. AVOID STATIC ELECTRICITYOR STRONG ELECTROMAGNETIC WAVES. RECOMMENDED TO WEAR A SHIELD RING.

WASHING-----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS RENAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING.WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

4.HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS


TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE. APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS. DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITYOR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOWS.


SENSOR TROUBLES RESULTING FROM MISUSE. INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER ' S RESPONSIBILITY.

TYPE: SLA-P	PAGE: 4 /6	CHART:	EDITION: A
NICERA SENSOR CO.,LTD			


**TOP VIEW
(FIGURE A)**

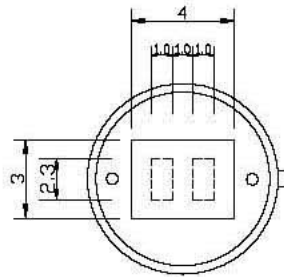


**SIDE VIEW
(FIGURE B)**

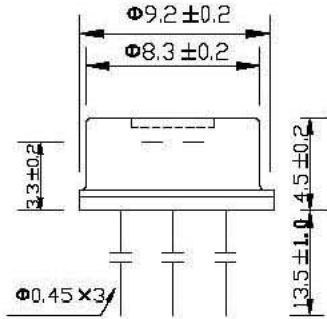


**BASE VIEW
(FIGURE C)**

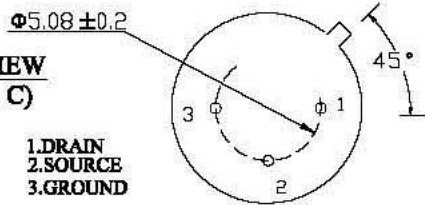

**CIRCUIT CONFIGURATION
(FIGURE D)**

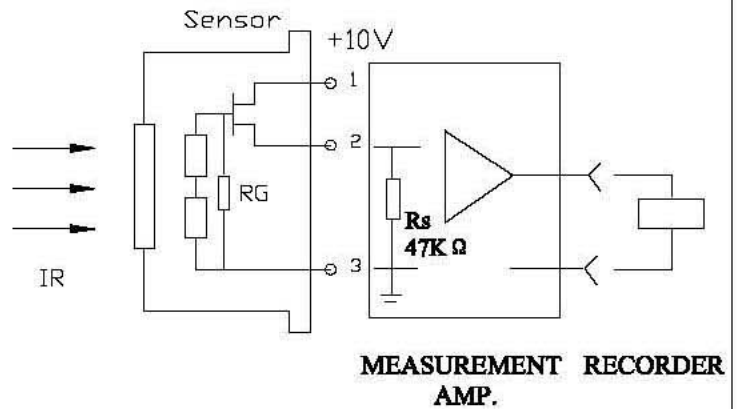

**FIELD OF VIEW
(FIGURE I)**



TYPE: SLA-P


PAGE: 5/6

CHART:


EDITION: A

NICERA SENSOR CO.,LTD


**TEST DIAGRAM
(FIGURE E)**

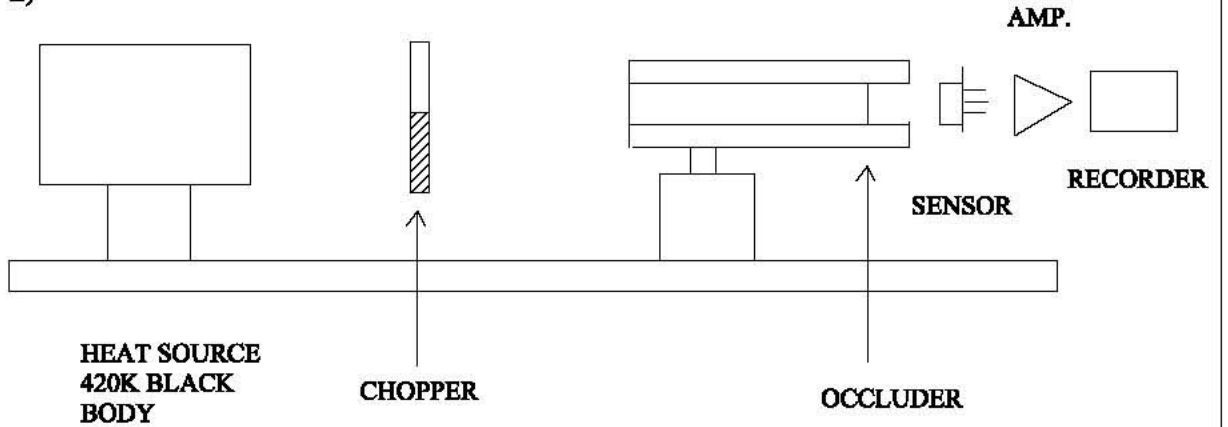


OCCLUDER POSITION

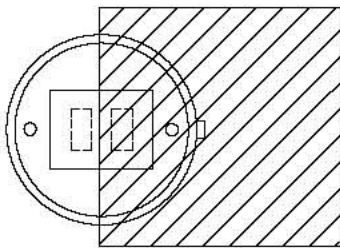

**SIGNAL OUTPUT
(FIGURE F)**

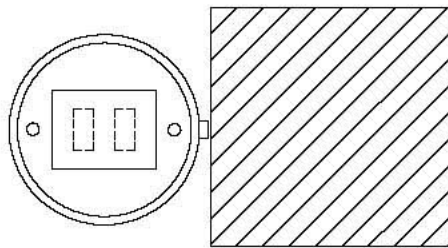

**BALANCE OUTPUT
(FIGURE G)**

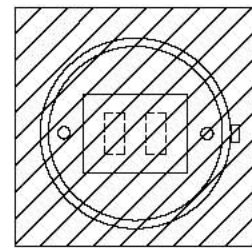

**NOISE OUTPUT
(FIGURE H)**

TYPE: SLA-P

PAGE: 6/6

CHART:

EDITION: A

NICERA SENSOR CO.,LTD